



ACTIVE-R3

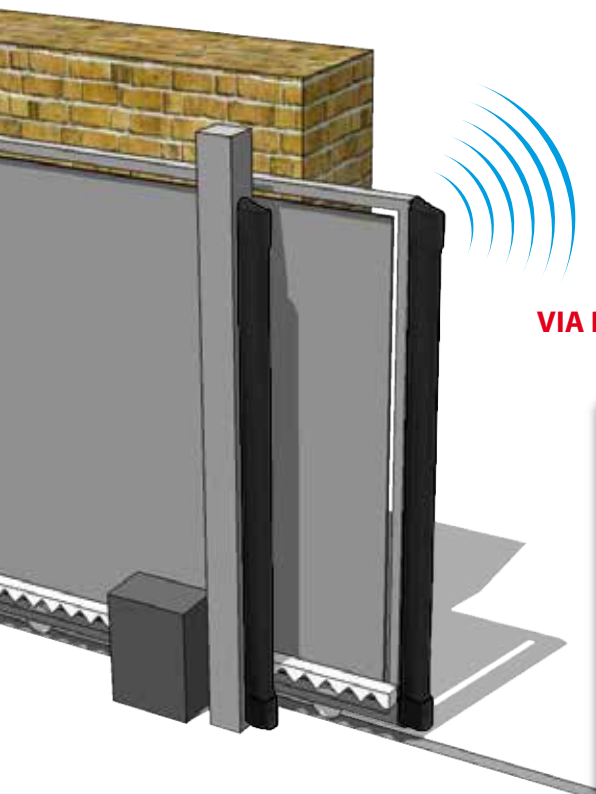

VIA RADIO

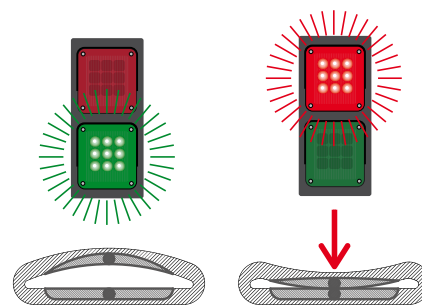

FEATURES RADIO / receiver RU


- Receiver 868 MHz in box
- 2 relay outputs with selectable operating modes
- Memory 6 COSTA ACTIVE-R (3 in relay 1, 3 in relay 2). By programming, an edge can activate 2 relays simultaneously
- Power supply: 12/24V ac/dc
- Consumption in rest/operation: 18 mA/80 mA
- Entry of self-check: 2 inputs 0/12/24 V ac/dc with selectable polarity
- Operating temperature: -20°C, +85°C
- Sealing: IP54 (IP65 with cable gland)
- Carton dimensions: 82 x 190 x 40 mm

JCM - 1003190

3G RB3 R868



TECHNICAL FEATURES



ACTIVE-R3 is a small sensitive edge with conductive technology that guarantees a quick response to any impact (along the whole length of the body).

The ACTIVE-R3 edge is easy to install and can be shortened to make it suitable for any kind of need.

TECHNICAL DATA

- Operating temperature: -20°C, +55°C
- Degree of protection: IP65
- Capacity: 40 mt
- Frequency: 868 MHz
- Integrated bidirectional 868 MHz Transmitter
- Power supply: two lithium batteries 3,6V - cod. BATT3.6V (included)
- Battery life: about 2 years



APE - 563 / 3312

length 1,50 mt

APE - 563 / 3316

length 1,70 mt

APE - 563 / 3320

length 2,00 mt

APE - 563 / 3325

length 2,50 mt