Segnalatore luminoso RGB a LED












MICRO-RGB è un SEGNALATORE LUMINOSO A LED ideale per segnalare lo stato di un impianto d'allarme o lo stato di una porta in un sistema di controllo accessi. Le dimensioni contenute lo rendono perfettamente applicabile sia a parete sia nei montanti delle chiusure senza alterare l'estetica degli ingressi. I colori acciaio/vetro dei materiali utilizzati si abbinano sia alle porte tradizionali che agli infissi realizzati in alluminio o altro materiale.

MICRO-RGB presenza di un morsetto a tre poli: comune e 2 poli per collegamento indipendente di comandi luce selezionabili nel colore in base alla selezione dei DIP SWITCH.



ESEMPIO DI SELEZIONE



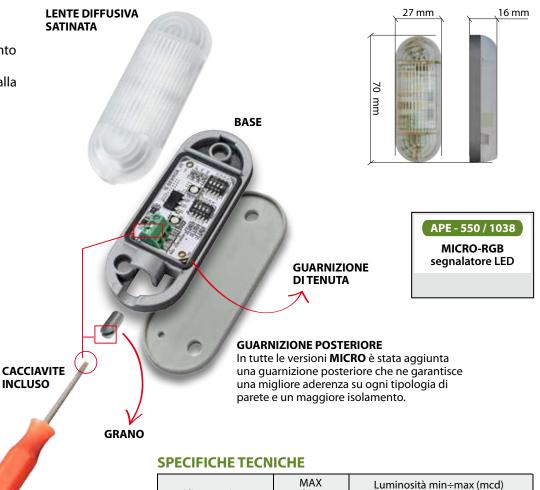

assorbimento (mA)

55

35

25

RED

GREEN

 $180 \div 350 | 450 \div 850 | 180 \div 350$

BLUE

Tabella di selezione dei DIP SWITCH

	SELEZIONE COLORE					
	Rosso e Verde singoli	IN Red doppio rosso IN Green doppio verde	IN Red pilota il BLU	IN Green pilota il BLU	IN Red e IN Green pilotano BLU singolo	IN Red oppure IN Green BLU doppio
DIP-SWITCH	IN Red 🔲 📘 IN Green	IN Red 🔲 🔲 IN Green	IN Red 🔲 📘 IN Green	IN Red 🔲 📘 IN Green	IN Red 🔲 📘 IN Green	IN Red 🔲 🔲 IN Green
	DL1 DL2	DL1 DL2	DL1 DL2	DL1 DL2	DL1 DL2	DL1 DL2
SW1-1		ON				
SW1- 2		ON				
SW1-3						ON
SW1-4						
SW2- 1	ON	ON		ON		
SW2- 2			ON		ON	ON
SW2- 3	ON	ON	ON			
SW2-4				ON	ON	ON

Alimentazione

24Vac +20% / -10%

24Vdc +/-20%

12Vdc +10% / -5%



















