

LED flashing lamps/  
Universal high luminous efficacy  
spare board

# MEGA RETROFIT


NEW



Thanks to our long-term experience with the Retrofit spare board and to our constant research of electronical components we designed a universal failsafe board. The wiring is made by 2 terminals from 12V to 230V ac and cc: thanks to the jumpers you can select the current and the flashing mode.

**MEGARETROFIT** has 18 LEDs, spread all over the 4 sides to offer a MEGAvisibility!  
The optional buzzer can be placed outside the flashing lamp and the antenna is suitable for 433 and 868 Mhz.

PATENT PENDING

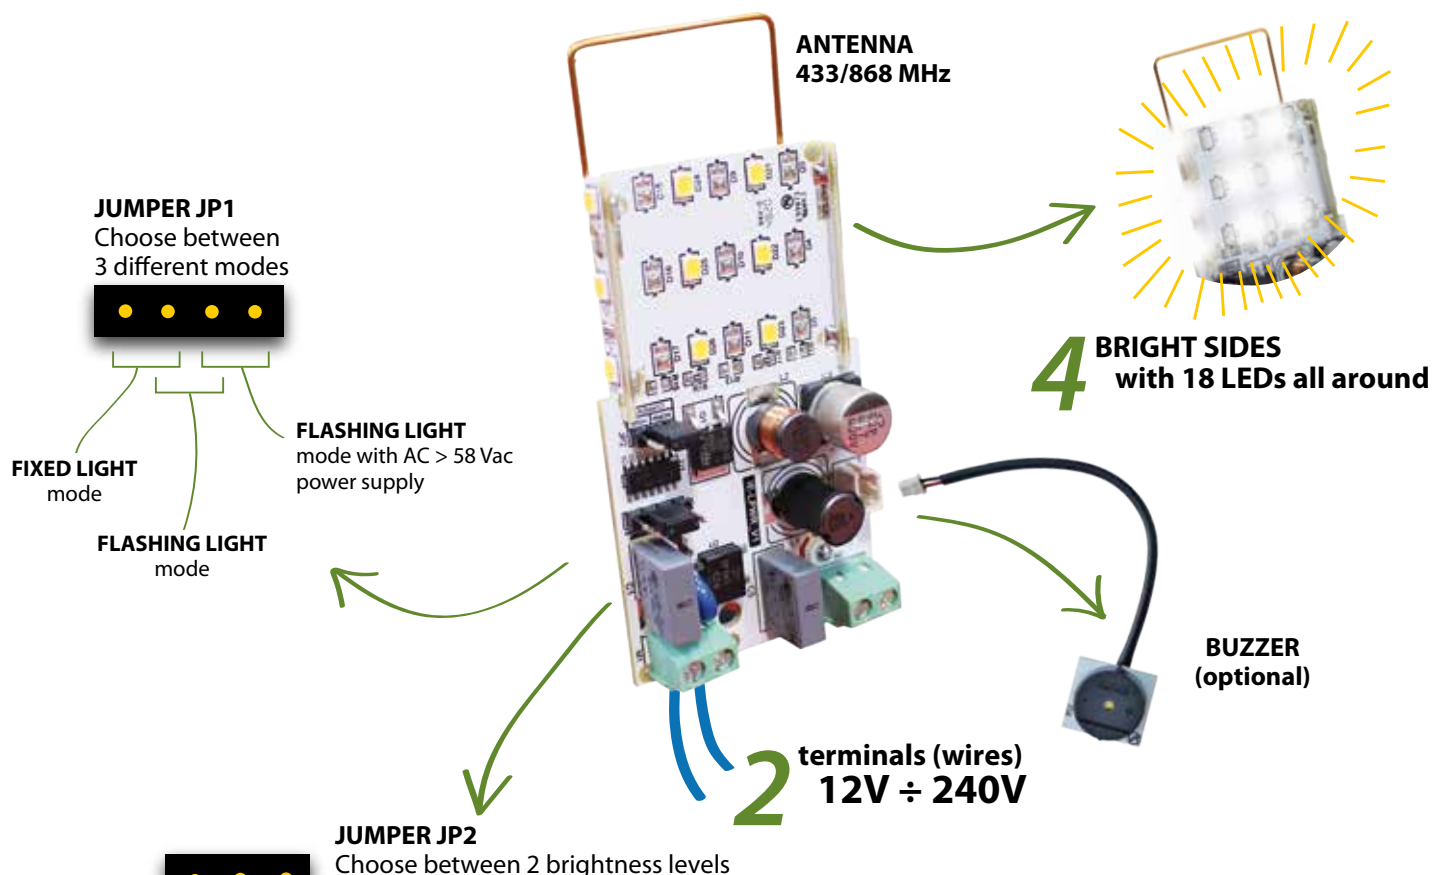

|                  | NORMAL selection    |              |                 | HIGH selection      |              |                 |
|------------------|---------------------|--------------|-----------------|---------------------|--------------|-----------------|
| Supply voltage   | MAX absorption (mA) | Consump. (w) | Brightness (lm) | MAX absorption (mA) | Consump. (w) | Brightness (lm) |
| 12 Vdc ÷ 48 Vdc  | 125mA@12Vdc         | 1,6          | 110             | 210mA@12Vdc         | 2,5          | 170             |
|                  | 33mA@48Vdc          | 1,6          | 110             | 60mA@48Vdc          | 2,9          | 170             |
| 12 Vac ÷ 230 Vac | 80mA@12Vac          | 1            | 110             | 141mA@12Vac         | 1,7          | 170             |
|                  | 23mA@230Vac         | 5,3          | 110             | 36mA@230Vac         | 8,3          | 170             |



APE - 550 / 1005



**MEGA RETROFIT**  
universal board

APE - 550 / 1006



**buzzer with wire**  
(optional)