


PARK

Traffic light control board
programmable via web app



Ability to manage up to 10 connected traffic lights
on a wired network up to 1 km away

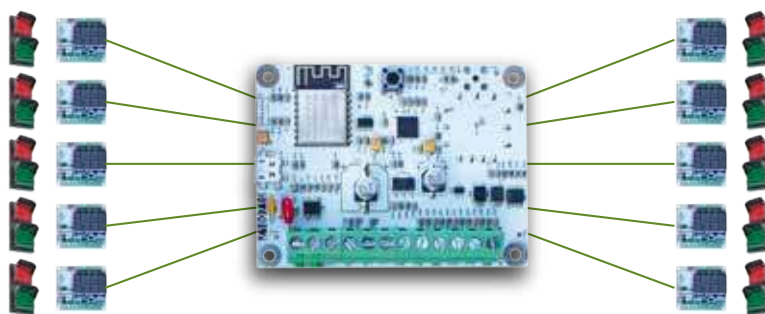

Easy to set up
with any device
(Wi-Fi)



- Power supply: 230V
- Degree of protection: IP65
- Operating temperature: -20°C, +60°C
- Communication: RS485 and WI-FI
- Logic: time, reservation, mixed and parking

APE - 511 / 2060

PARK MASTER
MASTER card for
traffic light control

APE - 511 / 2070

PARK SLAVE
SLAVE card for
traffic light control

APE - 511 / 2080

KIT PARK
n.1 PARKMASTER +
n.2 PARKSLAVE