

3H-IR14C/BL

Activation and safety of sliding doors
in a compact sensor size,
according to EN16005





Infrared technology, dual relay output.

- **Technology:** active infrared resection
- **Supply voltage:** 12-24 Vdc/Vac \pm 10%
- **Current consumption:** 40 mA (24 VDC)
- **Installation height: 3000mm max**
- **Temperature range:** -20°C to +60°C
- **Output:** SAFETY = NO relay contact / ACTIVATION = NO relay contact
- **Degree of protection:** IP54
- **Dimensions:** 210 x 59 x 28.5 mm



HOT - 3H - IR14C/BL

3H-IR14C Black color

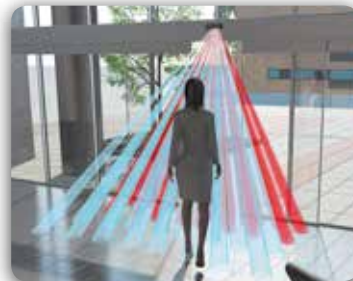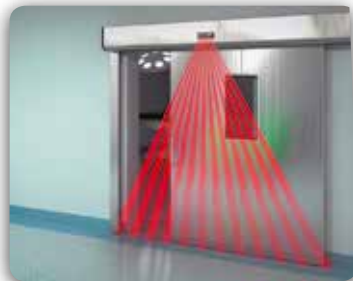

accessories available
for 3H-IR14C/BL

HOT - WC - IR/BL



Rain cover

HOT - UTB/BL



Lower mounting bracket

HOT - HA - 14



Bracket for recessed
mounting