

ECO-KEY

Surface-mounted two contacts key-switch



- Start/Stop
- Cylinder PREFER
- Technopolymer
- Degree of protection: IP54
- Operating temperature: -20°C, +55°C
- Switches absorption: 16A
- Dimensions: 75x75x31h mm



APE - 518 / 0030

ECO-KEY
Surface-mounted
key switch

FLAT

Aluminium wall-mounted key-switch

- 2 contacts: 16A
- Dimensions: 79x30x79h mm



APE - 136 / 6015

FLAT - Aluminium
wall-mounted
key-switch

SMALL59

Aluminium security box
with break release and push button



APE - 556 / 1150

SMALL59
Security box

- Wall mounting
- Material: alluminium
- Electrical connection in accordance with the three-way terminal block
- Lock: made in Italy european cylinder

ECO-KEY-IN

Two contacts flush-mounted key switch




- Start/Stop
- Cylinder PREFER
- Technopolymer
- Degree of protection: IP54
- Operating temperature: -20°C, +55°C
- Switches absorption: 16A



APE - 518 / 0040

ECO-KEY IN
Flush-mounted
key switch

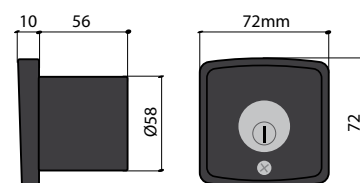

SMALL53

Wall-mounted selector switch
with break release



NEW

- Break release with hexagonal key
- Interchangeable cylinder made in Italy
- Key with European cylinder
- Release lever in the keyfob
- Metal body
- Dimensions: 53x108hx44 mm



APE - 556 / 1155

SMALL53
wall-mounted selector
with release

SMALL53-IN

Flush-mounted selector switch
with break release



NEW

- Flush-mounted on tubular 40x60mm
- Interchangeable cylinder made in Italy
- break release with hexagonal key
- Dimensions: 57x120hx37 mm



APE - 556 / 1154

SMALL53-IN
Flush-mounted selector
switch with break release