

## HR100-CT/BL

Advanced unidirectional detection sensor  
with monitored security system and exclusive  
"Door Learn" function





Extraordinary state-of-the-art sensor capable  
of capable of ensuring the activation of doors  
pedestrian doors and unprecedented  
security at mounting heights no to 3m.



**HOT - HR100 - CT/BL**  
HR100CT Black color

- **Technology:** active infrared reflection
- **Supply voltage:** 12-24 Vdc/Vac  $\pm$  10%
- **Current consumption:** 60 mA (24 VDC)
- **Installation height:** adjustable **2000-3000mm**
- **Temperature range:** -20°C to +60°C

- **Output:** Open collector 7.5mA (Min) load resistor
- **Degree of protection:** IP54
- **Dimensions:** 230 x 70 x 44 mm

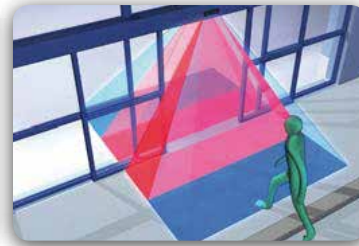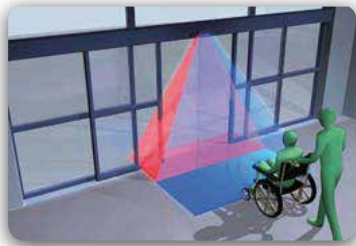

accessories available  
for HR100-CT/BL

**HOT - WC - IR/BL**



Rain cover

**HOT - UTB/BL**



Lower mounting bracket

**HOT - HA - 121**



Bracket for recessed  
mounting