
Central unit with remote control-controlled electric brake for motorized rolling shutters

SH230POWER










Its special feature is the ability to be able to drive and unlock the electric brake of shutter motors even in case of 230V power failure thanks to a backup battery. The function is activated by pressing 2 keys simultaneously for more than 3 seconds



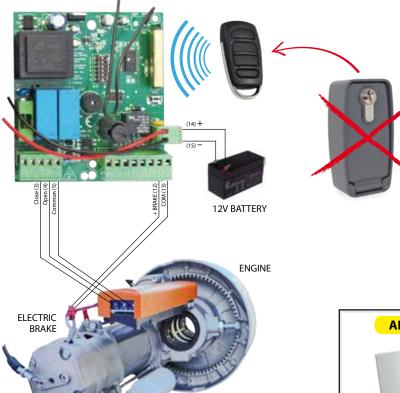

PHOTOCELLS

Technical Characteristics:

- Power supply: 230 Vac 50 +/-10%
- Motor power: 750 W
- Operating time: programmable max 2 minutes 30 seconds
- Automatic closing time: programmable max 3 minutes
- Electrobrake release via radio fixed 60 seconds
- Safety edge input 8K2 or flush NC
- Code combinations: 72 million codes
- Radio code programming: self-learning
- Frequency: 433.92Mhz
- Sensitivity: greater than -100dbm
- Reception range: standard 50m (10m man present)
- Antenna: built-in
- Battery: 12V 1.2Ah (included)
- Dimensions: 145x195hx50mm
- Operating temperature: 0°C, +70°C



SH230POWER - Central unit for motorized rolling shutters

APE - 528 / 3040



SH4 - 4-channel transmitter channels frequency 433.92 MHz for SH line

(*) See instructions for compatible models