



ACTIVE-RES




Easy to install and can be shortened to size, **ACTIVE-RES** is using conductive technology in a small sensitive edge. The safety device ensures a rapid response to impacts along the entire length of the structure.

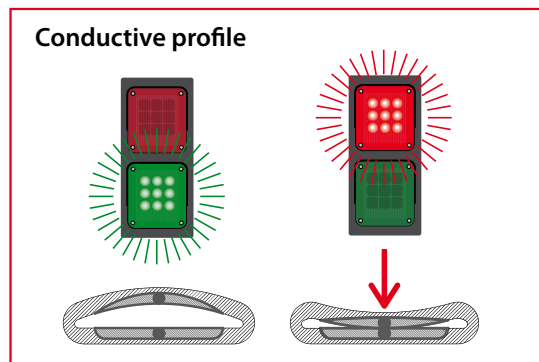

TECHNICAL FEATURES

- Operating temperature: -20°C, +55°C
- Degree of protection: IP65

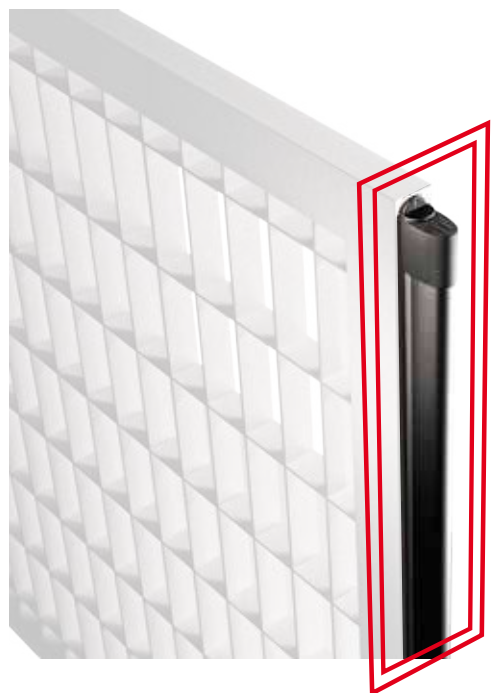

Guaranteed safety over the entire length of the edge including headers

CONTROL BOARD FOR RESISTIVE SENSITIVE EDGES 8,2K

Equipped with two channels, ensures continuous system self-checking, which is blocked in the case of faults. Available in **protection category 2 PL D (IMQ-certified)**



APE - 563 / 4455

control board category 2

APE - 563 / 4412

length 1,20 mt

APE - 563 / 4416

length 1,60 mt

APE - 563 / 4420

length 2,00 mt

APE - 563 / 4425

length 2,50 mt