



SPK spiral cables are made from high-quality materials, making them suitable for the most intensive installations. The extension factor is four times the block length (BL). Spiral cables are resistant to microbes, hydrolysis and almost all mineral oils, thanks to a special sheath compound.

In addition, spiral cables are UV-stable and halogen-free.

The material is black PUR/PUR, the colour of the wires complies with DIN 47100:


3 wires = brown, white, green

4 wires = brown, white, green, yellow

5 wires = brown, white, green, yellow, grey


6 wires = brown, white, green, yellow, grey, pink

Variable cable ends (see table), including 40, 50, 60, 80, 100 or 200 mm without sheath and equipped with cable lugs (AEH).

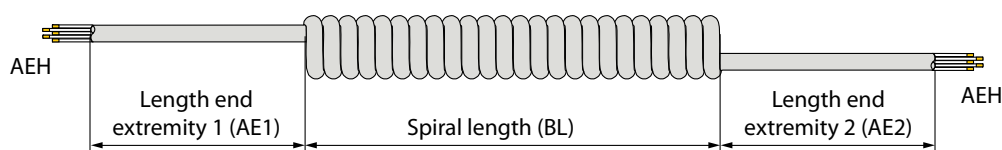


Designation	Spiral length	Total cable length	Length end extremity 1 (AE1)	Length end extremity 2 (AE2)	code	
3 wires						
SPK 3x0,5 mm ²	750	3000	200	200	WI-314769	
SPK 3x0,5 mm ²	900	3600	200	200	WI-314780	
SPK 3x0,5 mm ²	900	3600	4000	350	WI-314927	
SPK 3x0,5 mm ²	750	3000	500	200	WI-314931	
SPK 3x0,5 mm ²	600	2400	500	200	WI-314921	
SPK 3x0,5 mm ²	950	3800	500	200	WI-314924	
4 wires						
SPK 4x0,25 mm ²	750	3000	200	200	WI-314851	
SPK 4x0,25 mm ²	900	3600	1000	400	WI-314772	
SPK 4x0,25 mm ²	1200	4800	4000	400	WI-314774	
SPK 4x0,25 mm ²	900	3600	2000	350	WI-315455	
5 wires						
SPK 5x0,25 mm ²	500	2000	1000	200	WI-314767	
SPK 5x0,25 mm ²	750	3000	200	200	WI-314721	
SPK 5x0,25 mm ² WHITE	750	3000	200	200	WI-314876	
SPK 5x0,25 mm ²	800	3200	1500	200	WI-314765	
SPK 5x0,25 mm ²	900	3600	200	300	WI-314745	
SPK 5x0,25 mm ²	900	3600	2000	350	WI-314923	
SPK 5x0,25 mm ²	1000	4000	1000	1500	WI-314874	
6 wires						
SPK 6x0,25 mm ²	900	3600	4000	350	WI-316978	

Brackets for spiral cables

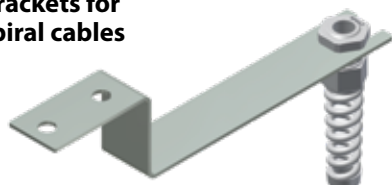

APE-589/315097
"Z"-shaped brackets
for spiral cable

including M16 spiral fixing screws



APE-589/315098
Brackets for
spiral cable

including M16 spiral fixing screws